



Domekt R 200 V C8 T

Maximal air flow, m ³ /h	233
Maximal air flow, l/s	65
Reference flow rate, m ³ /s	0,045
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,3
Thermal efficiency of heat recovery, %	80
Electric air heater capacity, kW / Δt, °C	0,8/14,3
Supply voltage, V	1~230
Maximal operating current HE, A	5,2
Power supply cable, mm ²	3×1,5
Electric power input of the fan drive at maximum flow rate, W	64
Electric power input of the fan drive at reference flow rate, W	24
Noise power level, L _{WA} , dB(A)	39
Noise pressure level, L _{PA} , dB(A), (3 m)	29
Filters dimensions B×H×L, mm	285×125×46
Unit dimensions B×H×L, mm	325×625×600
Maintenance space, mm	300
Unit weight, kg	42

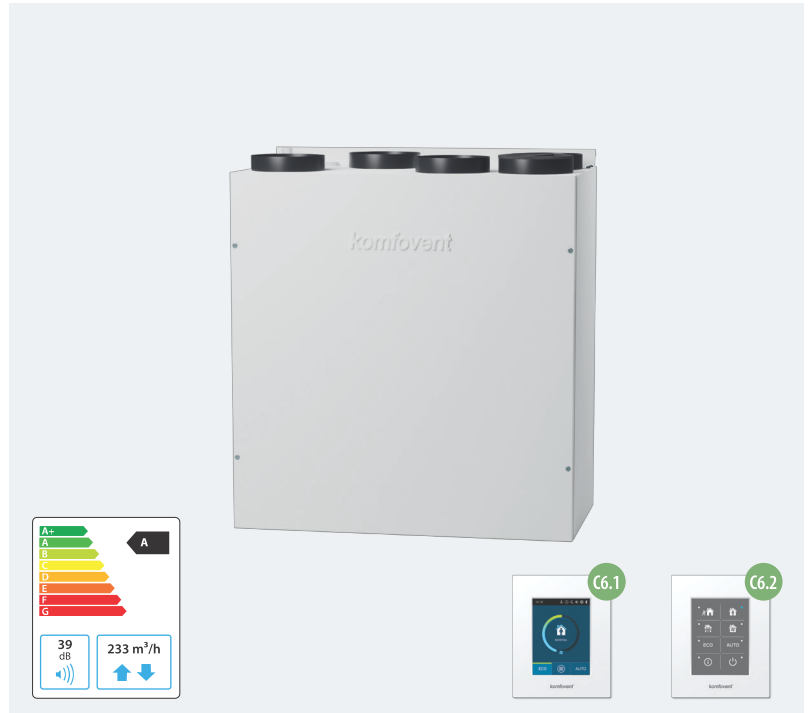

Performance

Unit with standard equipment

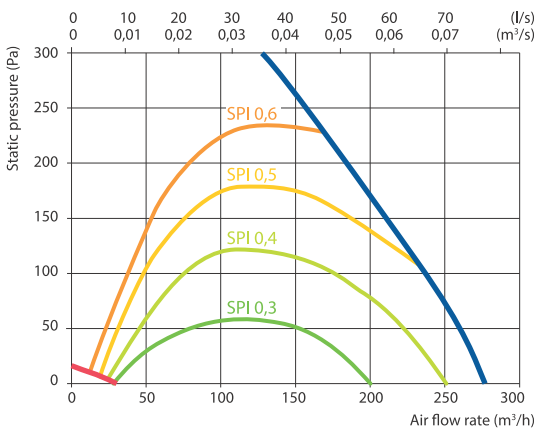

Accessories




Closing damper	AGUJ-M-125+LF230/CM230
Silencer	A/D AGS-125-50-600-M
	B/C AGS-125-50-900-M
Water heater	DH-125
PPU	PPU-HW-3R-15-0,4-W2
2-way valve (heater)	VVP47.10-0,4+SSF161.05HF
Kitchen hood	392-12
Decorative panel	392-12
Air distribution box	OSD-200VE/OSD2-200VE
Outdoor grill	LD-125

Temperature efficiency

	Winter					Summer		
Outdoor temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	13,4	14,9	15,9	16,8	17,8	22,6	23,5	24,5

indoor +22 °C, 20 % RH

Shown as right (R1)



Shown as left (L1)

