


Verso CF 1500 F C5

Nominal air flow according to ErP 2018, m ³ /h	1459
Nominal air flow according to ErP 2018, l/s	405
Electric air heater capacity, kW / Δt, °C	4,5/7,9
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	12,9
Maximal operating current HW, A	6,7
Power supply cable E, mm ²	5×2,5
Power supply cable W, mm ²	3×1,5
Electric power input of the fan drive at maximum flow rate, W	460
Noise power level, L _{WA} , dB(A)	57
Noise pressure level, L _{PA} , dB(A), (3 m)	46
Filters dimensions B×H×L, mm	550×420×46
Unit dimensions B×H×L, mm	1100×527×1650
Panel thickness, mm	50
Maintenance space, mm	400
Unit weight, kg	190



Performance

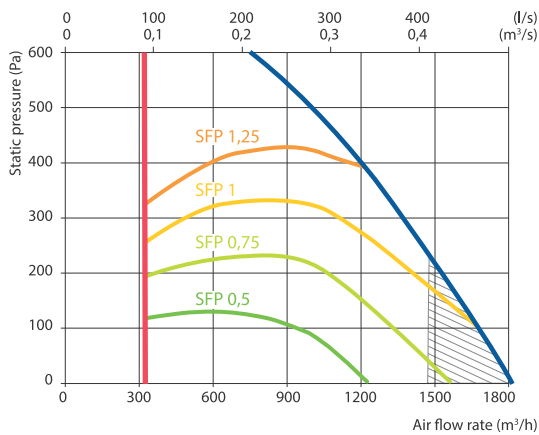

Does not conform to ErP2018 requirements

Accessories

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	ODA/EHA AGS-315-100-900-M
	SUP/ETA AGS-315-100-1200-M
Water heater	DH-315
Water cooler	DCW-1,6-11
PPU	PPU-HW-3R-15-1-W2
Water heater-cooler	DHCW-315
2-way valve	VVP47.20-4,0+SSF161.05HF
DX cooler	DCF-1,6-11
Cooling unit	MOU-36HFN8+KA8243

Mounting positions



Temperature efficiency

Outside temperature, °C	Winter					Summer		
	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	16,0	16,3	16,6	17,3	18,0	22,6	23,8	25,0

Indoor +22 °C, 20 % RH


Hot water duct air heater *

	Winter		
	80/60	70/50	60/40
Capacity, kW	3,0	3,0	3,0
Flow rate, dm ³ /h	131	131	131
Pressure drop, kPa	5,2	5,2	5,3
Temperature in/out, °C	16,0 / 22,0		
Maximal capacity, kW	12,6	10,1	7,6
Connection, "	½		


* Option

Shown as right (R1)

View from inspection side

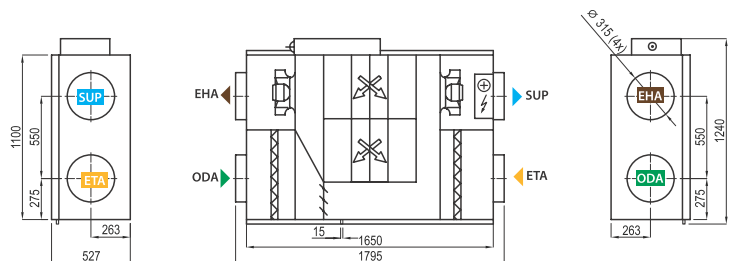

Shown as left (L1)

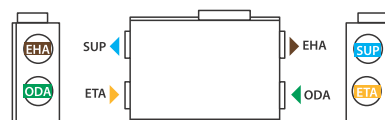

ODA – outdoor intake
 SUP – supply air
 ETA – extract indoor
 EHA – exhaust air