


## Verso R 3000 F C5

|   |               |
|---|---------------|
| Nominal air flow according to ErP 2018, m <sup>3</sup> /h     | 2781          |
| Nominal air flow according to ErP 2018, l/s                   | 773           |
| Electric air heater capacity, kW / Δt, °C                     | 9/7,9         |
| Supply voltage HE, V  | 3~400         |
| Supply voltage HW, V  | 3~400         |
| Maximal operating current HE, A                               | 19,8          |
| Maximal operating current HW, A                               | 7,1           |
| Power supply cable E, mm <sup>2</sup>                         | 5x2,5         |
| Power supply cable W, mm <sup>2</sup>                         | 5x1,5         |
| Electric power input of the fan drive at maximum flow rate, W | 720           |
| Noise power level, L <sub>WA</sub> dB(A)                      | 60            |
| Noise pressure level, L <sub>PA</sub> dB(A), (3 m)            | 49            |
| Filters dimensions BxHxL, mm                                  | 560x540x96    |
| Unit dimensions BxHxL, mm                                     | 1210x648x2160 |
| Panel thickness, mm   | 50            |
| Maintenance space, mm   | 600           |
| Unit weight, kg   | 289           |


### Performance

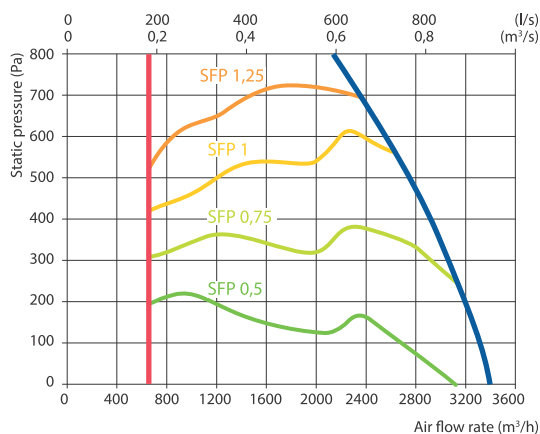

### Accessories

|                |   |
|----------------|---|
| Closing damper | SRU-M-500x400+LF24/LM24   |
| Silencer       | ODA/EHA STS-IVR3BA-600-400-700-S<br>SUP/ETA STS-IVR3BA-600-400-1250-S |
| Water heater   | SVK-700x400-2R  |
| Water cooler   | DCW-3,0-20  |
| PPU            | PPU-HW-3R-15-1.6-W2   |
| 2-way valve    | VVP45.25-6.3+SSB161.05HF  |
| DX cooler      | DCF-3,0-20-2  |
| Cooling unit   | 2xMOU-36HFN8+KA8243   |

### Mounting positions

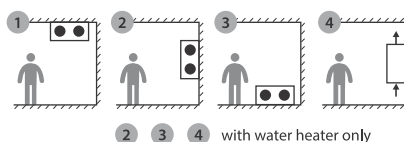

### Temperature efficiency

|                          | Winter |      |      |      |      | Summer |      |      |
|--------------------------|--------|------|------|------|------|--------|------|------|
| Outside temperature, °C  | -23    | -15  | -10  | -5   | 0    | 25     | 30   | 35   |
| After heat exchanger, °C | 12,8   | 14,5 | 15,5 | 16,5 | 17,5 | 22,6   | 23,6 | 24,6 |

Indoor +22 °C, 20 % RH


### Hot water duct air heater \*

|                               | Winter      |       |       |
|-------------------------------|-------------|-------|-------|
| Water temperature in/out, °C  | 80/60       | 70/50 | 60/40 |
| Capacity, kW                  | 10,2        | 10,2  | 10,2  |
| Flow rate, dm <sup>3</sup> /h | 450         | 448   | 446   |
| Pressure drop, kPa            | 8,1         | 8,2   | 8,3   |
| Temperature in/out, °C        | 12,8 / 22,0 |       |       |
| Maximal capacity, kW          | 26,0        | 21,1  | 16,1  |
| Connection, "                 | 1/2         |       |       |


\* Option

### Shown as right (R1)

View from inspection side

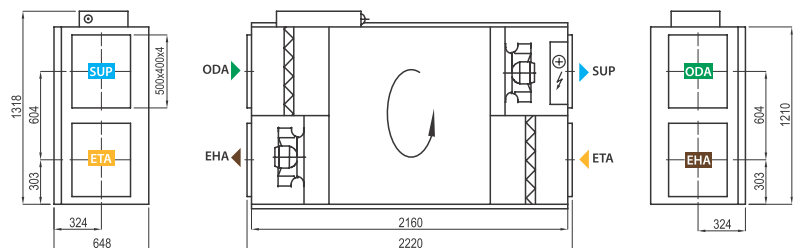

### Shown as left (L1)



ODA – outdoor intake

SUP – supply air

ETA – extract indoor

EHA – exhaust air