


Domekt CF 250 F C6

Maximal air flow, m ³ /h	292
Maximal air flow, l/s	81
Reference flow rate, m ³ /s	0,057
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,29
Thermal efficiency of heat recovery, %	86
Electric air heater capacity, kW / Δt, °C	0,5/7,1
Electric preheater capacity, kW / Δt, °C	1/14,3
Supply voltage, V	1~230
Maximal operating current HE, A	8,3
Power supply cable, mm ²	3×1,5
Electric power input of the fan drive at maximum flow rate, W	91
Electric power input of the fan drive at reference flow rate, W	33
Noise power level, L _{WA,r} dB(A)	46
Noise pressure level, L _{PA,r} dB(A), (3 m)	35
Filters dimensions B×H×L, mm	265×250×46
Unit dimensions B×H×L, mm	604×294×1250
Maintenance space, mm	300
Unit weight, kg	52



Performance

Unit with standard equipment

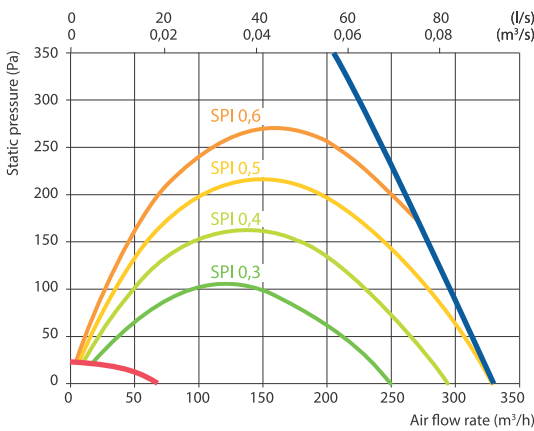

Accessories

Closing damper	AGUJ-M-160+LF230/CM230
Silencer	ODA/EHA AGS-160-50-600-M
	SUP/ETA AGS-160-50-900-M
Water heater	DH-160
PPU	PPU-HW-3R-15-0,4-W2
2-way valve (heater)	VVP47.10-0,4+SSF161.05HF
2-way valve (cooler)	VVP47.10-1,6+SSF161.05HF
Outdoor grill	LD-160
Water heater-cooler	DHCW-160

Mounting positions



Temperature efficiency


	Winter					Summer		
Outdoor temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger*, °C	18*	18,9*	18,9*	18,9*	18,9	22,4	23,1	23,8

indoor +22 °C, 20 % RH

* calculations made after evaluation of the preheater.

Shown as right (R1)

View from inspection side

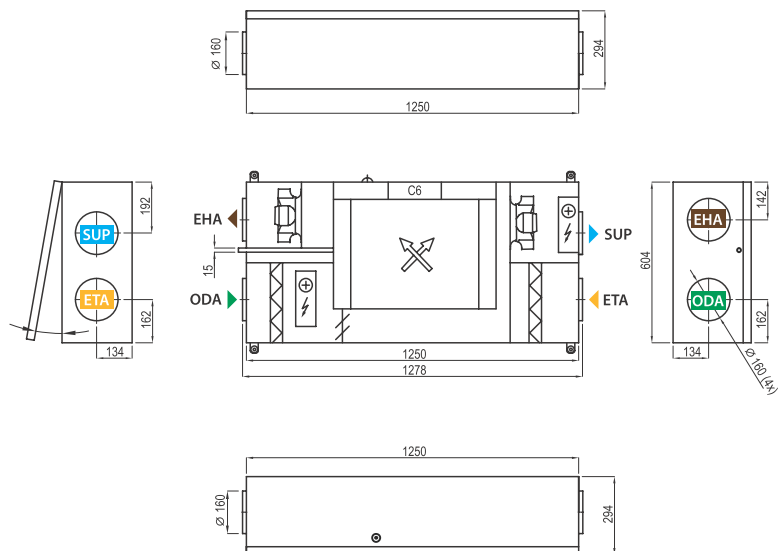

Shown as left (L1)



▶ ODA – outdoor intake ▶ SUP – supply air ▶ ETA – extract indoor ▶ EHA – exhaust air